



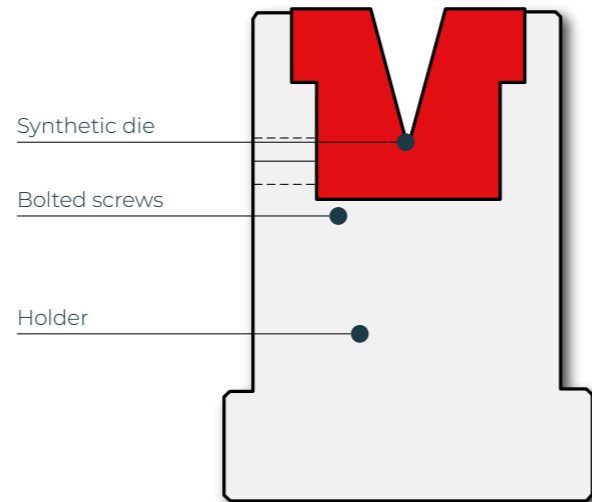


Synthetic Dies


► Synthetic dies will be adjusted into the housing and secured with bolted screws

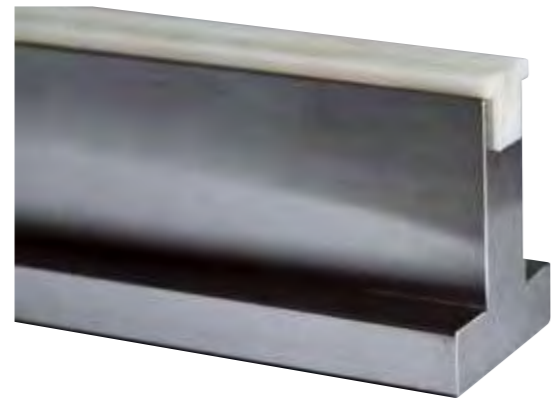


C45: 560-710 N/mm ²			1000 kN/m max.
TN80.14			
835 mm	€ 310,-	15.0 kg	R1
415 mm	€ 170,-	7.5 kg	




Synthetic			200 kN/m max.
INS14...			
835 mm	€ 143,-	0.30 kg	° V [mm]
415 mm	€ 84,-	0.15 kg	
INS14.06.88	88°	6	
INS14.08.88	88°	8	
INS14.10.88	88°	10	
INS14.06.60	60°	6	
INS14.08.60	60°	8	
INS14.10.60	60°	10	
INS14.06.45	45°	6	
INS14.08.45	45°	8	
INS14.10.45	45°	10	
INS14.06.30	30°	6	
INS14.08.30	30°	8	



C45: 560-710 N/mm ²			1000 kN/m max.
TN80.20			
835 mm	€ 310,-	19.0 kg	R1
415 mm	€ 170,-	9.5 kg	




Synthetic			200 kN/m max.
INS20...			
835 mm	€ 158,-	0.4 kg	° V [mm]
415 mm	€ 89,-	0.2 kg	
INS20.06.88	88°	6	
INS20.08.88	88°	8	
INS20.10.88	88°	10	
INS20.12.88	88°	12	
INS20.16.88	88°	16	
INS20.06.60	60°	6	
INS20.08.60	60°	8	
INS20.10.60	60°	10	
INS20.12.60	60°	12	
INS20.16.60	60°	16	
INS20.06.45	45°	6	
INS20.08.45	45°	8	
INS20.10.45	45°	10	
INS20.12.45	45°	12	
INS20.06.30	30°	6	
INS20.08.30	30°	8	
INS20.10.30	30°	10	




Synthetic Dies


C45: 560-710 N/mm ²			1000 kN/m max.
TN80.30			
835 mm	€ 310,-	25.0 kg	R1
415 mm	€ 170,-	12.5 kg	



Synthetic			200 kN/m max.
INS30...			
835 mm	€ 158,-	0.5 kg	° V [mm]
415 mm	€ 89,-	0.3 kg	
INS30.06.88	88°	6	
INS30.08.88	88°	8	
INS30.10.88	88°	10	
INS30.12.88	88°	12	
INS30.16.88	88°	16	
INS30.20.88	88°	20	
INS30.25.88	88°	25	
INS30.06.60	60°	6	
INS30.08.60	60°	8	
INS30.10.60	60°	10	
INS30.12.60	60°	12	
INS30.16.60	60°	16	
INS30.20.60	60°	20	
INS30.06.45	45°	6	
INS30.08.45	45°	8	
INS30.10.45	45°	10	
INS30.12.45	45°	12	
INS30.16.45	45°	16	
INS30.20.45	45°	20	
INS30.06.30	30°	6	
INS30.08.30	30°	8	
INS30.10.30	30°	10	
INS30.12.30	30°	12	
INS30.16.30	30°	16	



C45: 560-710 N/mm ²			1000 kN/m max.
TMN95.20			
835 mm	€ 378,-	12.0 kg	R2 R3
415 mm	€ 216,-	6.0 kg	

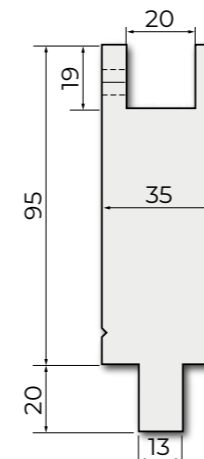

Synthetic			200 kN/m max.
INS20...			
835 mm	€ 158,-	0.4 kg	° V [mm]
415 mm	€ 89,-	0.2 kg	
INS20.06.88	88°	6	
INS20.08.88	88°	8	
INS20.10.88	88°	10	
INS20.12.88	88°	12	
INS20.16.88	88°	16	
INS20.06.60	60°	6	
INS20.08.60	60°	8	
INS20.10.60	60°	10	
INS20.12.60	60°	12	
INS20.16.60	60°	16	
INS20.06.45	45°	6	
INS20.08.45	45°	8	
INS20.10.45	45°	10	
INS20.12.45	45°	12	
INS20.06.30	30°	6	
INS20.08.30	30°	8	
INS20.10.30	30°	10	

